



10/529963
PCT/GB 2003/004473
31 MAR 2005
INVESTOR IN PEOPLE

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 17 NOV 2003

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated 28 October 2003

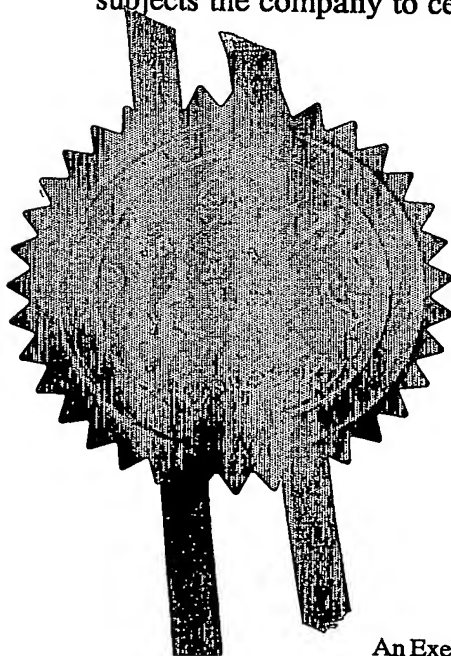


The
Patent
Office

11OCT02 17:55:05-1 010007
P01/7700 0.00-0223632.1

1/77

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

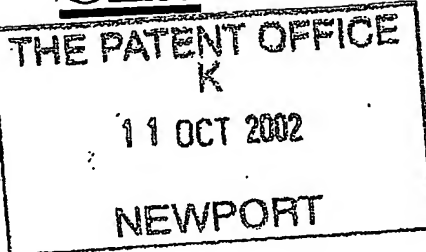

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

P3123 GB PRO

2. Patent application number
(The Patent Office will fill in this part)

0223632.1

11 OCT 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

AOTI OPERATING COMPANY, INC.
131 NW HAWTHORNE AVENUE
SUITE 207
BEND, OREGON 97701, US

Patents ADP number (if you know it)

813805002

If the applicant is a corporate body, give the country/state of its incorporation

DELAWARE, USA

4. Title of the invention

SEMICONDUCTOR TESTING INSTRUMENT

5. Name of your agent (if you have one)

NOVAGRAAF PATENTS LIMITED

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

THE CRESCENT
54 BLOSSOM STREET
YORK YO14 1AP

Patents ADP number (if you know it)

08299166001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 13

Claim(s)

Abstract

Drawing(s) 5 + 5 RW

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

NOVAGRAAF PATENTS LIMITED

10/10/2002

12. Name and daytime telephone number of person to contact in the United Kingdom PETER WILSON (DR) 01904 610586

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

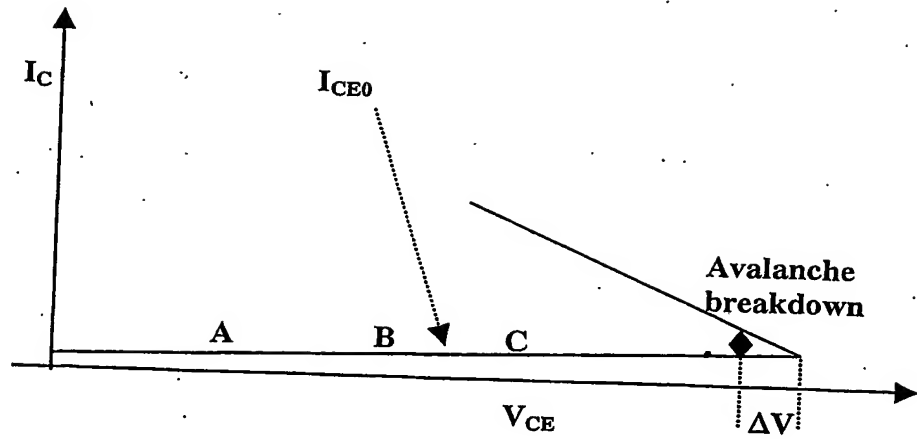


Figure 1




Figure 2

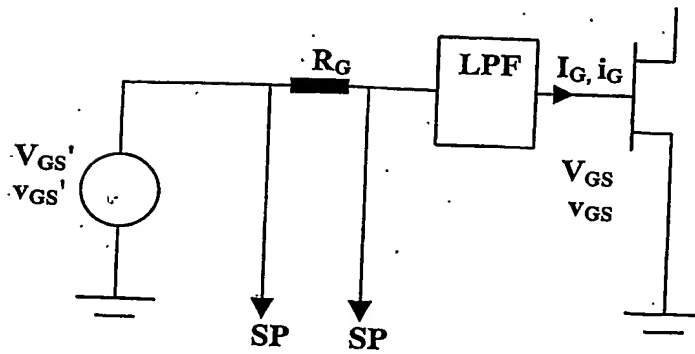


Figure 3

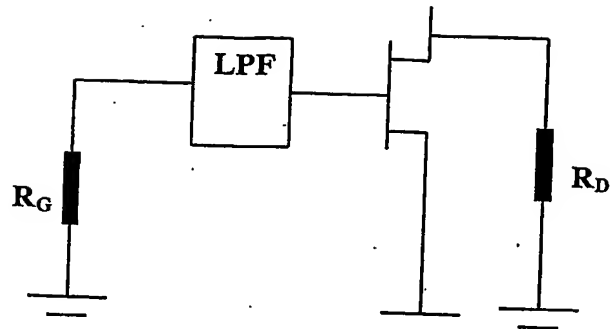


Figure 4

Input generator




Figure 5

Input op amp

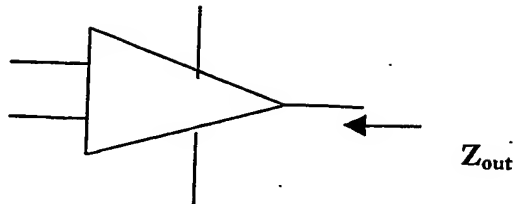


Figure 6

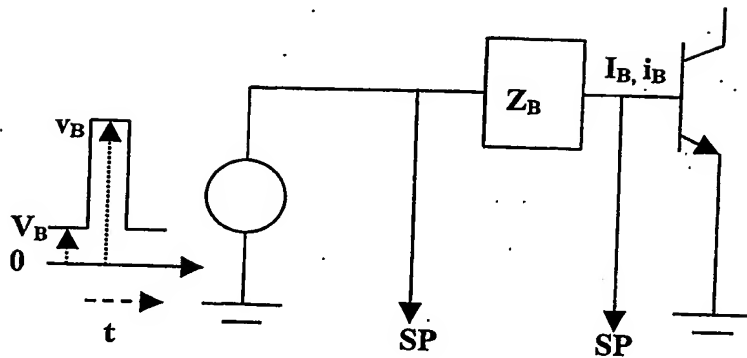


Figure 7

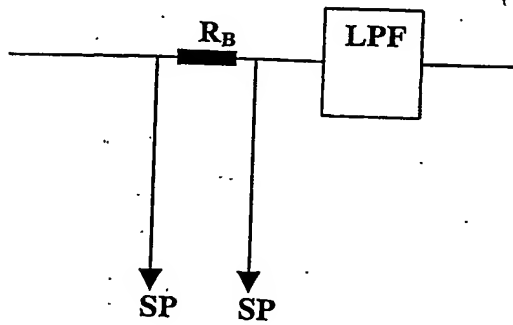


Figure 8

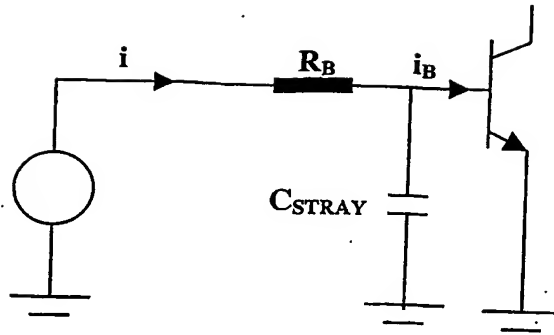


Figure 9

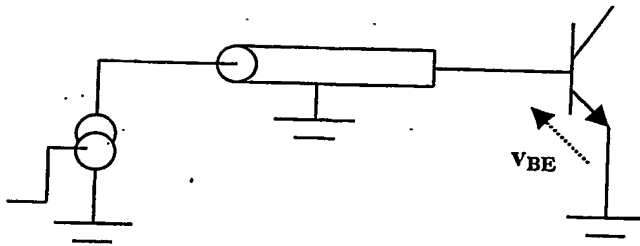


Figure 10

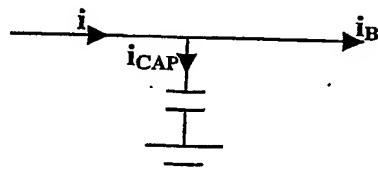


Figure 11

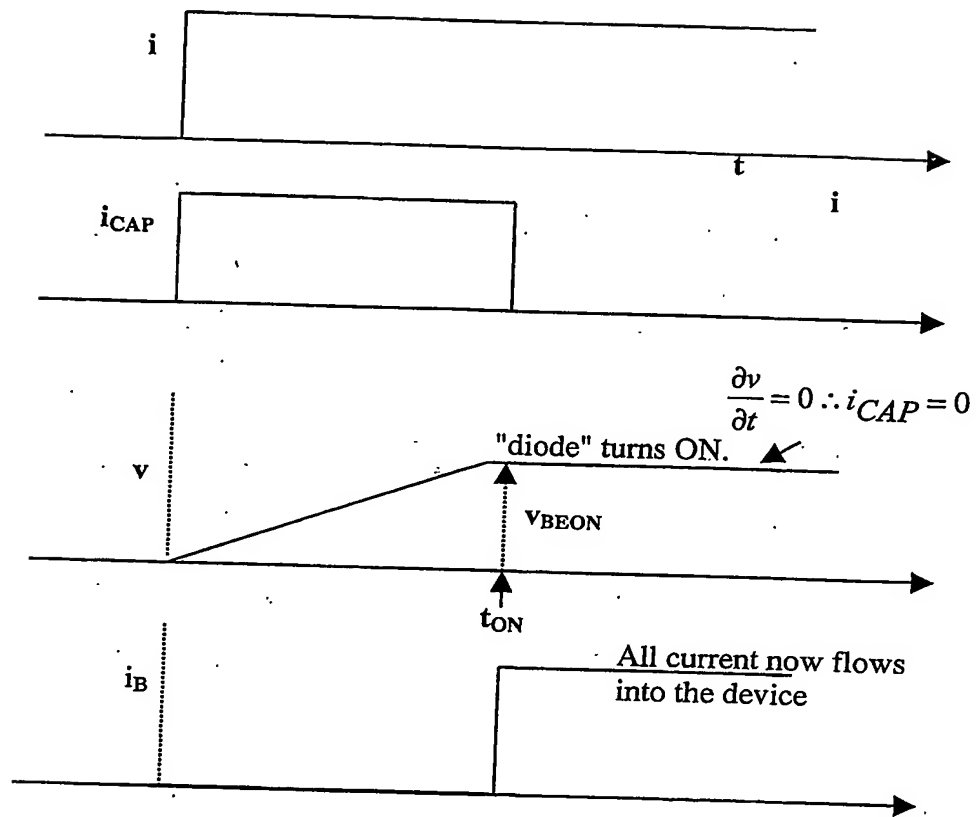


Figure 12

SEMICONDUCTOR TESTING INSTRUMENT

5 The present invention relates to a semiconductor testing instrument, and in particular to an instrument for determining the safe area of operation of such a device, especially of the bipolar type, and especially at RF frequencies and/or under large signal conditions. The invention also relates to a method of such measurement.

10 Increasingly, modern electronic systems rely upon semiconductor devices operated under large-signal conditions. For example, mobile phone handsets, power amplifiers, base stations, radars, missile guidance systems, electronic instruments, and other like electronic systems use semiconductor integrated circuits (ICs) or discrete devices which are designed to operate under such
15 large signal conditions.

For semiconductor devices of all types, including transistor devices, semiconductor LEDs and lasers and other semiconductor devices, there is a
20 thus a general requirement to be able to determine the dc safe area of operation (SOA), in the high-voltage low-current limit, without risking destruction of the device under test, and thus to identify the safe area of operation for the device.

This applies to most types of transistor devices (discrete or integrated) including, without limitation, those listed below, but is particularly the case
25 for bipolar and like devices which are prone to undergo catastrophic avalanche breakdown outside the operational area.

- bipolar transistors: NPN and PNP devices.[1]
- silicon FETs including MOSFETs (metal-oxide-semiconductor field-effect
30 transistors) and LDMOS (laterally diffused metal oxide semiconductor).[1]

- MESFETs (metal-electrode-semiconductor field-effect transistors. Most commonly GaAsFETs when fabricated in GaAs).[2]
- HEMTs (high electron mobility transistors).[2]
- HBTs (heterojunction bipolar transistors).[1,2]

5

Note that devices marked [1] are generally fabricated in silicon (Si), silicon-germanium (SiGe) or silicon carbide (SiC), whereas devices marked [2] are generally fabricated using high-electron mobility compound semiconductor materials such as gallium arsenide (GaAs) or indium phosphide (InP).

10

It is an object of the present invention to mitigate some or all of the above disadvantages.

15

It is a particular object of the present invention to provide a testing instrument and method for accurate determination of the dc safe area of operation (SOA), in the high-voltage low-current limit, without risking destruction of the device under test, and thus to identify the safe area of operation for the device under test.

20

In accordance with the invention at its broadest a device for determination of the dc safe area of operation of a semiconductor device under test comprises a means to apply an adjustable bias at the input of a device under test, whereby the means first applies a dc bias at a bias point within the safe operating limit, and then applies a variable bias comprising fast, superimposed rectangular

25

bipolar pulses and the instrument further comprises means to measure the current response thereto so as to extrapolate a detailed I-V response in the vicinity of the safe operating limit.

30

In accordance with the principles of the invention a dc bias is applied by the instrument within the safe operating limit of the device under test in

conventional manner. A variable bias comprising fast, super imposed rectangular bipolar pulses is then applied by the instrument with the intention of taking the device under test beyond the operational limit. Conveniently, this is achieved in that the pulses are applied with progressively increasing
5 amplitude.

This takes the device under test for a short period beyond the safe operating limit, and in its particular preferred application with bipolar and like devices, into the avalanche breakdown area. However, it is a characteristic feature of
10 the instrument in accordance with the invention that the short pulse rates, combined with rapid measurement times, enable this breakdown area to be identified before catastrophic breakdown has time to occur in the device under test.

15 For accurate determination of the breakdown point, the above process may be repeated as an iterative succession. An initial dc bias is applied at a point known to be well within the safe operating area of the device under test. A pulsed bias is superimposed, and in particular a pulsed bias of progressively increased amplitude is superimposed. As incipient breakdown is detected the
20 pulsed bias is removed. A second dc biasing point is determined in the vicinity of but safely below the breakdown point as identified by the first stage in the iterative process, and the process is repeated. After several iterations a very accurately determined breakdown point is obtained.

25 Thus, in accordance with the foregoing, the invention permits accurate and specific measurement of the safe operating area, and in particular of any catastrophic breakdown point, of a particular semiconductor device in non-destructive manner.

Preferably, the pulsed wave form is essentially critically damped so as to achieved a minimum rise time up to the point where the pulses become substantially flat. There is a further general requirement that the pulses to be applied must provide a high degree of isolation of the instrument from external
5 influences that would otherwise degrade the performance.

The particular problem encountered at the high pulse frequencies required by the instrument of invention is that of applying a suitable biasing pulse, maintaining the pulse shape and integrity, and rapidly measuring current
10 responses, whilst at the same time achieving device stability. At these frequencies, practical devices tend to undergo spurious oscillation when under test.

It has been suggested in the prior art that higher frequency pulses could be applied while keeping devices stable by use of a "bias tee". However, the
15 capacitances within such as bias tee give the bias tee itself its own frequency response, which in practice limits the speed of the pulse which can be used. By contrast, in the present invention, fast stepped pulses in particular with pulse rates below about one μ s and more preferably in some cases below 100
20 Ω s, are desired if avalanche effects are to be avoided.

In a particular embodiment of the invention, this is achieved in that the means to apply the adjustable bias at the input comprises a high stability voltage source serially connected to the input via a resistor, and preferably further
25 serially connected through a low pass filter.

The power supply is selected to have a very low output impedance even at the high frequencies used to apply the test pulse.

The effect of this arrangement as incipient spurious oscillations arise will be understood. To spurious oscillation disturbances the near perfect power supply appears as a short. The circuit therefore functions in effect as a resistive termination, and it is well understood that such a resistive termination is effective as a means of unconditionally stabilising a transistor or like device.

The resistor used to achieve this resistive termination must be very low in parasitic reactances. Device stabilisation is preferably achieved by a resistance in the range of some 10s of Ω to 100s of Ω , for example 50 Ω to 500 Ω .

The inclusion of an optional low pass filter represents a second stabilisation measure which increases the effectiveness of stabilisation at input. The low pass filter is selected such as to be effectively transparent at the pulse rates and rise times under test, but act to inhibit time dependent variations in current or voltage at higher oscillation frequencies.

Conveniently, the low pass filter comprises a shunt capacitor across the resistance followed by a series inductor.

20

In accordance with a further aspect of the invention, a method for determination of the dc safe area of operation of a semiconductor device under test comprises applying a dc bias at the input of the device under test to determine a bias point near to the safe operating limit, applying an adjustable bias at the input of the device under test comprising fast, super imposed rectangular bipolar pulses, rapidly measuring the current response thereto at both the input and output, extrapolating from the responses a detailed I-V response for the device in the vicinity of the safe operating limit.

25

Preferred features of the method and preferred or necessary parameters for the bipolar pulse, pulse rates, measurement times etc will be understood by analogy with the foregoing.

- 5 The invention will now be described by way of example only with reference to Figures 1 to 13 of the accompanying drawings wherein:

Figure 1 is an illustration of the I-V characteristics for a typical bipolar device;

Figure 2 illustrates the principle of resistively terminating a FET;

- 10 Figure 3 illustrates an arrangement for an embodiment of the invention supplying power at a gate of an FET;

Figure 4 illustrates an effective equivalent circuit to Figure 3 as far as spurious noise oscillations are concerned;

Figures 5 and 6 illustrate preferred pulse generators;

- 15 Figures 7 and 8 illustrates an example circuit especially suited for application of the invention to a bipolar transistor;

Figure 9 illustrates the problem of stray shunt capacitance;

Figures 10-12 illustrate an embodiment of the invention adapted to produce particularly short pulse lengths of the order of 1 ns.

20

I-V characteristics for a typical bipolar semiconductor device under test are shown in figure 1. I_{CE0} is the current flowing from collector-to-emitter with the base open circuit ($i_B = 0$). The I-V curve illustrates the catastrophic avalanche breakdown which is a particular characteristic of bipolar devices. Some FETs and HEMTs collapse in a similar manner. The invention is particularly applicable to the detection of the safe operating limit in devices which undergo this or another form of runaway breakdown at the edge of that limit, and is discussed by way of example in relation to a bipolar device, but is not limited to such use.

30

The requirement is to detect the onset of avalanche breakdown very rapidly, and then reduce the voltage so it does not occur. For this the following approach is adopted.

- 5 The device-under-test is biased under DC conditions at the point marked \blacklozenge on the curve in figure 1. This is within a fraction of a volt of breakdown and the voltage difference is ΔV . This remaining voltage ΔV is then applied under pulse conditions.
- 10 The key is to keep the pulse and sampling times short enough to detect and catch the avalanche before it becomes destructive, i.e. before runaway sets in.

In this approach it is important to start conservatively. Referring to Figure 1, the process is carried out iteratively from a series of base bias points

15 succesively nearer to the breakdown point.

- The process begins at test point A and then a steady increase in the pulse amplitude is applied until breakdown just starts to occur. At this point the pulse must be rapidly removed, but the breakdown voltage will now be
- 20 approximately known so it is possible to increase the voltage such that test point B (TPB) is reached. Now there is a new, reduced, ΔV between this TPB voltage and breakdown and the process is repeated - setting to test point C, etc. - until the DC test point voltages converge at breakdown. Then the breakdown voltage is accurately known.

25

In the example this procedure is followed manually but rapidly. An automated device adapted to perform the iteration without user intervention could be envisaged.

A test device in accordance with the invention applies the DC bias and applies pulses at this bias point to the device-under-test. However, parasitic impedances arise in series with the source or (base). Also there are parasitic impedances from these terminals to ground. These impedances arise inevitably
5 from the device itself, from jigs supporting the device-under-test, from the measuring instrument, connecting cable, etc.). The existence of these parasitic impedances means that the device-under-test is subject to a risk of oscillation.

Meaningful measurements cannot proceed with an oscillating device. The
10 question therefore arises as to how to achieve device stability. With the device in accordance with the invention arrangements are made to precisely ensure stability. How this is achieved is discussed below.

In order to unconditionally stabilise a transistor microwave engineers tend
15 naturally to resistively terminate the output of the device - drain to ground for an FET and collector to ground for a bipolar. This principle is illustrated in figure 2. Although an FET transistor is shown it will be understood that the same approach is also applicable by analogy to a bipolar type device.

20 It is a key feature of the preferred embodiment of the present invention that the testing device is adapted to mimic this principle.

Figure 3 illustrates how this is achieved in the example device on the input side (gate or base). The choice of R_G is critical, being some tens to hundreds
25 of ohms and *very* low in parasitic reactances. A very important feature is that the introduction of the low-pass filter (LPF) represents a second stabilisation measure.

As far as spurious "incipient" oscillation or noise signals are concerned the circuit appears as shown in Figure 4 (in which the output is also shown as resistively terminated by the resistor R_D).

- 5 The low-pass filter (LPF) has to be transparent at the pulse rates and rise times attendant to the measurement, but also must be such as to quench and inhibit time-dependent variations in current or voltage at higher (oscillation) frequencies.
- 10 In practice the LPF is realised simply as a shunt capacitor across R_G followed by a series inductor in the gate (or base) lead.

This arrangement:

- Keeps the device under test stable.
- 15 • Allows input and output conduction currents to be measured under dc and dynamic conditions.
- Allows dc biases and pulses to be applied simultaneously to the device under test.
- Allows fast (few tens of nanoseconds rise time) pulses to be applied.
- 20 • Provides a measure of buffering or isolation of the device under test, which preserves the pulse shape and integrity.
- Provides a measure of protection from device destruction by current runaway - especially with bipolar devices.
- Provides a measure of short-circuit protection for the instrument.

25

There are also important special aspects regarding the pulse generator. This is indicated in Figure 5. This generator is realised in practice in the form of an operational amplifier (op amp), as shown in Figure 6.

The important requirement is that for the op amp the output impedance Z_{out} must be kept extremely low - even at RF and microwave frequencies. For this the op amp need to be specially selected.

- 5 The consequence is that this scheme allows short pulses to be generated - down to a few tens of nanoseconds (ns).

The foregoing examples have been given in terms of FET transistors allowing good illustration of the principles of resistive termination. However, the invention is particularly applicable to bipolar transistors and the like which undergo catastrophic avalanche failure. Bipolar Transistor Measurements present particular difficulties. Figures 7 and 8 illustrate the principles of an embodiment of the invention in measuring, at constant base current I_B , the dynamic I-V characteristics of bipolar transistors - which are notoriously unstable.

10

15

There are two important issues;

- (i) How to measure the dynamic I-V conduction characteristics with I_B constant as parameter, whilst keeping the device stable.
- 20 (ii) Defining the measurement conditions for valid measurement of the dynamic I-V conduction characteristics uncorrupted by the reactive effects.

Considering issue (ii) first of all. The measurement conditions are satisfied by maintaining the pulse length greater than a time as defined by the following inequality:

25

$$t_{pulse} \geq t_{ON} = \frac{(\beta + 1)i_{BSTEP}}{2\pi f_T \left(\frac{kT}{q} \right)} R_B \ln \left[1 + \frac{v_{BEON}}{i_{BSTEP} R_B} \right]$$

In which: t_{ON} is the time required to fully turn the transistor on, β is the DC collector-to-base current ratio, f_T is the current transition frequency and all the remaining quantities are readily known. At normal ambient temperature ("room" temperature) $T = 298K$ and the kT/q ratio is $0.025V$.

5

There is one connection approach that might ideally be desired - but which cannot be achieved - which is to drive the base input from a constant current source. Microwave and RF engineers, will understand that this cannot practicably be achieved. At the high frequencies associated with the very short
 10 pulses only S-parameters may be used and these demand matched terminations - not the open or short-circuit approximations used with h-parameters or y-parameters, etc.

(Under small-signal linearized conditions one can measure S-parameters and
 15 then transform the results into h, y, z ABCD or other sets of parameters. However, under large-signal conditions this cannot be done.)

So, for measuring a bipolar transistor, what has to be established is the type of circuit indicated in Figure 7. As before, sampling points SP are immediately
 20 followed by A > D converters within the measuring instrument.

Regarding Z_B , this required series impedance is:

- (a) realistic in the practical case, and
- 25 (b) needed for device under test stability.

With Z_B it is now possible to measure directly what is required, as follows:

Z_B is realised as resistor R_B in series with a low-pass filter (LPF), indicated in
 30 Figure 8.

R_B is typically a few hundreds of ohms in value and it must also be very low in parasitic reactance's. Note that the value range is around an order-of-magnitude larger than for R_D described in conjunction with measurements on FETs, see above. The LPF has to be "transparent" at the pulse rates and rise times in use. In this method fast-sampling is used at the SP points (i.e. A-D5 and A-D6) and iterate V_B , v_B (digitally) until I_B , i_B are as set - or as desired.

Figure 9 illustrates an embodiment of the device specifically adapted for measurement at very low i_B values - in the region of $1\mu A$ order of magnitude.

The stray instrument capacitance C_{STRAY} represents a problem and special low-capacitance buffering techniques, internal to the measuring instrument, are required to keep the effective stray capacitance low - down to the order of a few pF. As this stray capacitance is made smaller, so i_B can be set ever smaller - within known accuracy limits.

Figure 10 illustrates an embodiment of the device specifically adapted for pulse lengths having an order of magnitude of 1 nanosecond (1 ns).

A problem arises at such short pulse lengths if a connection is made using a cable run that is predominantly capacitive, as shown in Figure 10. This is approximately equivalent to the simple circuit shown in Figure 11 which shows the current i_{CAP} that flows in the capacitive element of the cable.

The key aspects are:

- (I) Start from $v_{BE} = 0$ (i.e. $i_B = 0$), then:
- (II) Turn the pulse on - from a current generator source.

The waveforms of Figure 12 show the effects - remembering that $i = C \frac{dv}{dt}$

The time t_{ON} can be ascertained by continually sampling (since when $i_B = 0$, $i_C = 0$). The sample acquisition time is around 1 to 2 ns. Therefore it is possible
5 to sample i_C and this enables measurements at pulse lengths of the order of .1 ns.

This Page is inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning documents *will not* correct images problems checked, please do not report the problems to the IFW Image Problem Mailbox